


Catalogue
2025

SPATALUX GmbH











INDEX

10 Series ● 05



11 Series ● 29



20 Series ● 55



21 Series ● 65



Framing Lighting ● 73



W20 Series ● 79



TL01 Series ● 89



Winner Series ● 105



Linear Light ● 111



INDEX

DL01 Series •113



DL02 Series •117



DL03 Series •127



DL04 Series •129



DL05 Series •131



Track Lighting Accessories •135





Lighting Controllers •139



Smart Lighting Introduction •141



CASAMBI

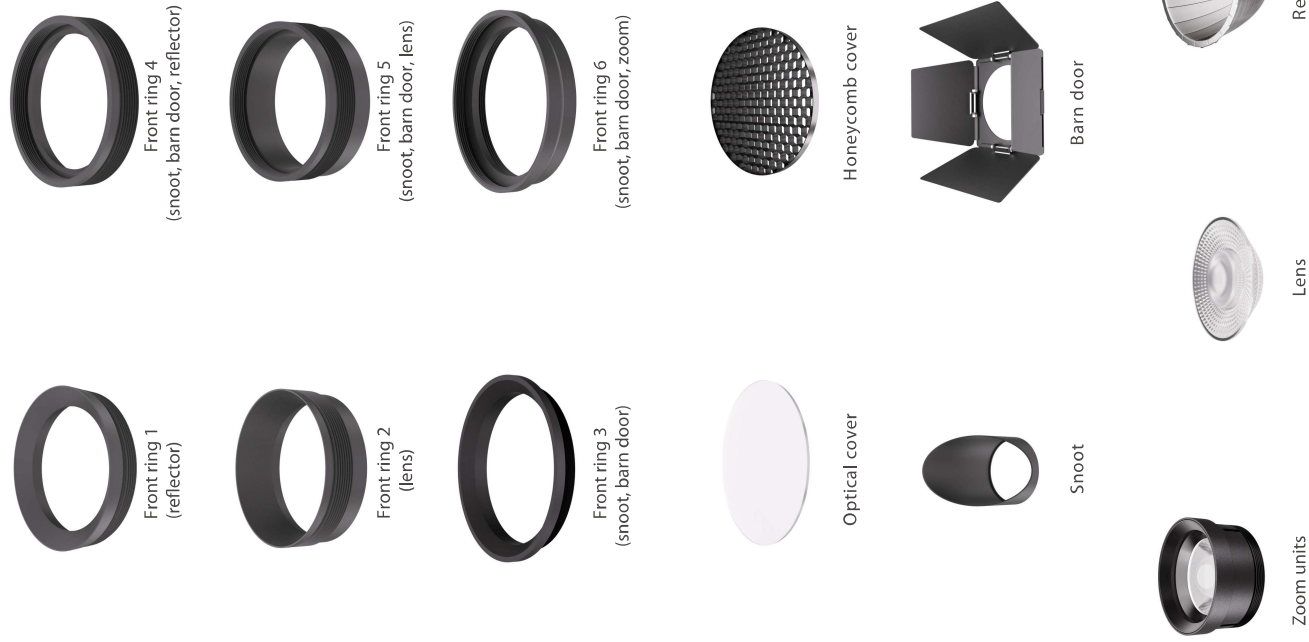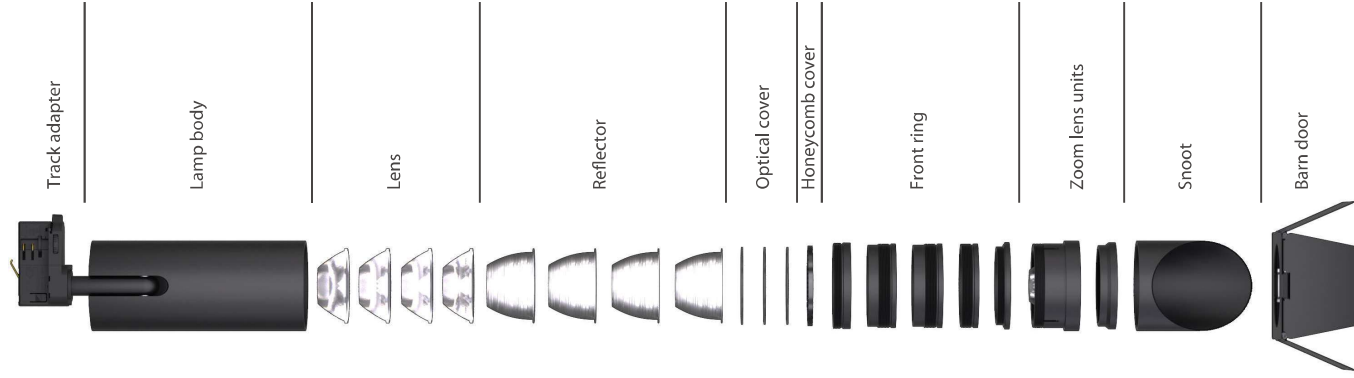




Art Gallery Level Lighting



Zoom type

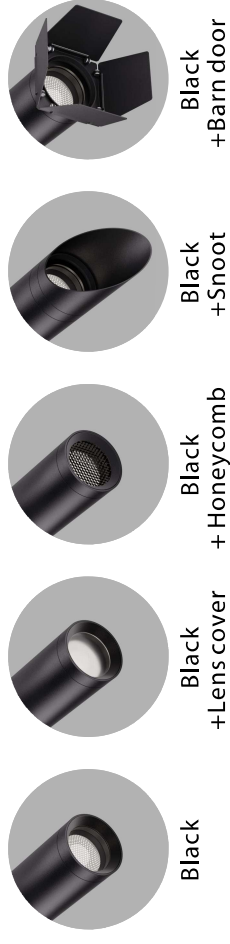

White




Fixed lens type








35mm Zoomable



Zoom 12~43°



Mounted


Model	o	Watt	Control	Dimension	Beam angle	Colortemp.	CRI	Lumen
33mm	(TRB)	4W	Triac Dim	D35*H86	12~43°	27/30/35/4000K	Ra90/97	160lm
● Input voltage: AC220~240V ● Housing color: White or Black								



45mm Zoomable




45mm, Driver Inside Type



Track

Recessed



Mounted




Zoom 8~40°

Model No.	Watt	Control	Dimension	Beam angle	Colortemp.	CRI	Lumen
45mm (ONF)	6W	No-Dim	D45*H114	8~40°	27/30/35/4000K	Ra90/97	170lm
45mm (TRB)	6W	Triac-Dim	D45*H114	8~40°	27/30/35/4000K	Ra90/97	170lm


Input voltage: AC220~240V Housing color: White or Black



45mm, Integrated Adapter Type




Dimmer on adapter
Brightness dimmable 5~100%

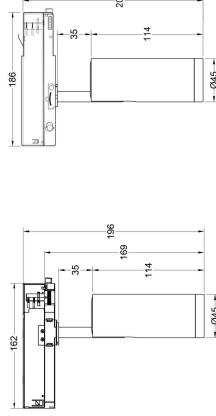

INT

DOA



TRI

Model No.	Watt	Control	Dimension	Beam angle	Colortemp.	CRI	Lumen
45mm (INT)	10W	No-Dim	D45*H114	8~40°	27/30/35/4000K	Ra90/97	350lm
45mm (TRI)	10W	Triac-Dim	D45*H114	8~40°	27/30/35/4000K	Ra90/97	350lm
45mm (DOA)	10W	1~10V Knob	D45*H114	8~40°	27/30/35/4000K	Ra90/97	350lm

Input voltage: AC220~240V Housing color: White or Black








55mm Zoomable



55mm, Driver Inside Type





Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
55mm (ONF)	10W	No-Dim	D55*H142	8~50°	27/30/35/4000K	Ra90/97	450lm
55mm (TRB)	10W	Triac	D55*H142	8~50°	27/30/35/4000K	Ra90/97	450lm
55mm (DOL)	10W	1 - 10V Knob	D55*H142	8~50°	27/30/35/4000K	Ra90/97	450lm
55mm (DAL)	10W	DALI	D55*H142	8~50°	27/30/35/4000K	Ra90/97	450lm

- Input voltage: AC220~240V Mousing color: White or Black



55mm, Integrated Adapter Type, External Driver Box Type

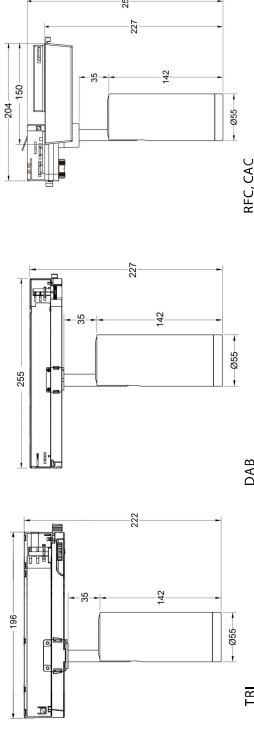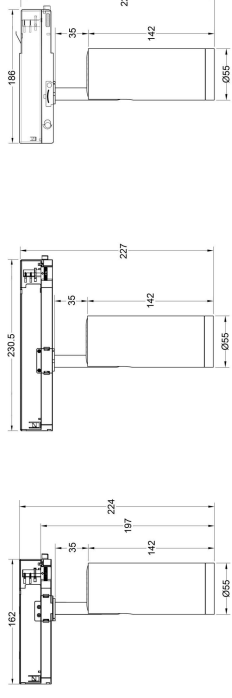

Model	N o	Watt	Control	Dimension	Beam angle	Colortemp.	CRI	Lumen
55mm	(INT)	12W	No-Dim	D55*H142	8~50°	27/30/35/4000K	Ra90/97	550lm
55mm	(TRI)	12W	Triac Dim	D55*H142	8~50°	27/30/35/4000K	Ra90/97	550lm
55mm	(DOA)	12W	1-10V Knob	D55*H142	8~50°	27/30/35/4000K	Ra90/97	550lm
55mm	(CAB)	12W	CASAMBI	D55*H142	8~50°	27/30/35/4000K	Ra90/97	550lm
55mm	(DAB)	12W	DALI 6 Wire	D55*H142	8~50°	27/30/35/4000K	Ra90/97	550lm
55mm	(RFC)	12W	RF 2.4G	D55*H142	13~50°	2700~6500K	Ra90/97	440lm
55mm	(CAC)	12W	CASAMBI	D55*H142	13~50°	2700~6500K	Ra90/97	440lm

● Input voltage: AC220~240V ■ Housing color: White or Black








75mm Zoomable




75mm, Driver Inside Type




Track



Recessed



Mounted




DOL

Model N o	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
75mm (ONF)	20W	No-Dim	D75*H176	15~55°	27/30/35/4000K	Ra90/97	2000lm
75mm (TRB)	20W	Triac	D75*H176	15~55°	27/30/35/4000K	Ra90/97	2000lm
75mm (DOL)	20W	1-10V Knob	D75*H176	15~55°	27/30/35/4000K	Ra90/97	2000lm
75mm (DAI)	20W	DALI	D75*H176	15~55°	27/30/35/4000K	Ra90/97	2000lm


Input voltage: AC220~240V Housing color: White or Black




75mm, Integrated Adapter Type, External Driver Box Type




INT




CAB




DOA



TRI



DAB



RFC, CAC

Model N o	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
75mm (INT)	20W	No-Dim	D75*H176	15~55°	27/30/35/4000K	Ra90/97	2000lm
75mm (TRI)	20W	Triac Dim	D75*H176	15~55°	27/30/35/4000K	Ra90/97	2000lm
75mm (DOA)	20W	1-10V Knob	D75*H176	15~55°	27/30/35/4000K	Ra90/97	2000lm
75mm (CAB)	20W	CASAMBI	D75*H176	15~55°	27/30/35/4000K	Ra90/97	2000lm
75mm (DAB)	20W	DALI 6Wire	D75*H176	15~55°	27/30/35/4000K	Ra90/97	2000lm
75mm (RFC)	20W	RF 2.4G	D75*H176	15~55°	2700~6500K	Ra90/97	1600lm
75mm (CAC)	20W	CASAMBI	D75*H176	15~55°	2700~6500K	Ra90/97	1600lm






Input voltage: AC220~240V Housing color: White or Black



90mm Zoomable



90mm, Driver Inside Type




Zoom 15~60°

Model N o	Watt	Control	Dimension	Beam angle	Colortemp.	CRI	Lumen
90mm (ONF)	30W	No-Dim	D90*H194	15~60°	27/30/35/4000K	Ra90/97	2500lm
90mm (TRB)	30W	Triac	D90*H194	15~60°	27/30/35/4000K	Ra90/97	2500lm
90mm (DOL)	30W	1-10V Knob	D90*H194	15~60°	27/30/35/4000K	Ra90/97	2500lm
90mm (DAL)	30W	DALI	D90*H194	15~60°	27/30/35/4000K	Ra90/97	2500lm
90mm (DAC)	20W	DALI	D90*H194	15~60°	2700~6500K	Ra90/97	1600lm

● Input voltage: AC220~240V Housing color: White or Black




90mm, Integrated Adapter Type, External Driver Box Type

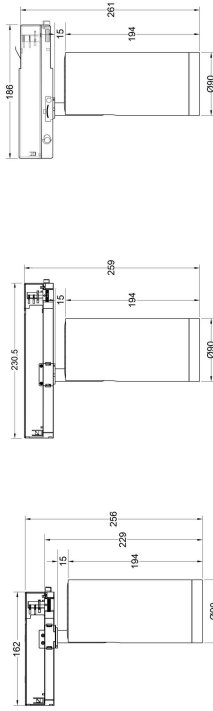


INT

CAB



DOA



DAB

RFC, CAC



Model N o	Watt	Control	Dimension	Beam angle	Colortemp.	CRI	Lumen
90mm (INT)	30W	No-Dim	D90*H194	15~60°	27/30/35/4000K	Ra90/97	2500lm
90mm (TRI)	30W	Triac Dim	D90*H194	15~60°	27/30/35/4000K	Ra90/97	2500lm
90mm (DOA)	30W	1-10V Knob	D90*H194	15~60°	27/30/35/4000K	Ra90/97	2500lm
90mm (CAB)	30W	CASAMBI	D90*H194	15~60°	27/30/35/4000K	Ra90/97	2500lm
90mm (DAB)	30W	DALI 6 Wire	D90*H194	15~60°	27/30/35/4000K	Ra90/97	2500lm
90mm (RFC)	30W	RF 2.4G	D90*H194	15~60°	2700~6500K	Ra90/97	2200lm
90mm (CAC)	30W	CASAMBI	D90*H194	15~60°	2700~6500K	Ra90/97	2200lm

● Input voltage: AC220~240V Housing color: White or Black






F35mm, Driver Inside Type



Track

Recessed



Mounted

F35mm Fixed Lens

Model No.	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
F35mm (TR8)	4W	Triac Dim	D35*H80	18°/30°/50°	27/30/35/4000K	Ra90/97	360lm
● Input voltage: AC220~240V Housing color: White or Black							







F45 Fixed Lens




F45mm, Driver Inside Type



Track

Recessed



Mounted




Model N o	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
F45mm (ONF)	6W	No-Dim	D45*H105	15°/24°/36°/50°	27/30/35/4000K	Ra90/97	420lm
F45mm (TR8)	6W	Triac	D45*H105	15°/24°/36°/50°	27/30/35/4000K	Ra90/97	420lm
F45mm (DTW)	6W	Triac	D45*H105	15°/24°/36°/50°	3000K to 2000K	Ra90/97	300lm

Input voltage: AC220~240V Housing color: White or Black

5 years
Warranty


Flicker
Free

F45mm, Integrated Adapter Type

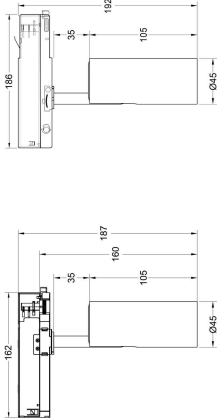

INT

DOA



TRI

Model N o	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
F45mm (INT)	10W	No-Dim	D45*H105	15°/24°/36°/50°	27/30/35/4000K	Ra90/97	780lm
F45mm (TRI)	10W	Triac Dim	D45*H105	15°/24°/36°/50°	27/30/35/4000K	Ra90/97	780lm
F45mm (DOA)	10W	1~10V Knob	D45*H105	15°/24°/36°/50°	27/30/35/4000K	Ra90/97	780lm

Input voltage: AC220~240V Housing color: White or Black

5 years
Warranty

Flicker
Free



F55mm Fixed Lens






F75mm, Fixed Lens




F75mm, Driver Inside Type

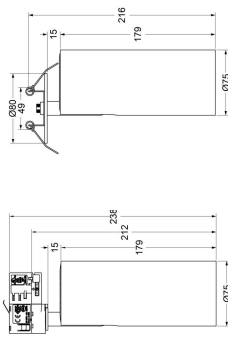

Track

Recessed

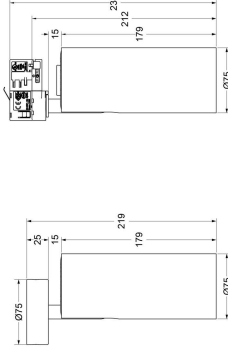


Mounted

Model N o	Watt	Control	Dimension	Beamangle	Colortemp.	CRI	Lumen
F75mm (ONF)	20W	No-Dim	D75*H179	15°/24°/36°/60°	27/30/35/4000K	Ra90/97	2000lm
F75mm (TRB)	20W	Triac	D75*H179	15°/24°/36°/60°	27/30/35/4000K	Ra90/97	2000lm
F75mm (DOL)	20W	1-10V Knob	D75*H179	15°/24°/36°/60°	27/30/35/4000K	Ra90/97	2000lm
F75mm (DAL)	20W	DALI	D75*H179	15°/24°/36°/60°	27/30/35/4000K	Ra90/97	2000lm


Input voltage: AC220-240V Housing color: White or Black



F75mm, Integrated Adapter Type, External Driver Box Type

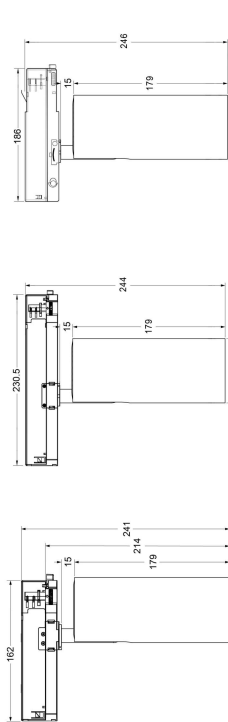


INT

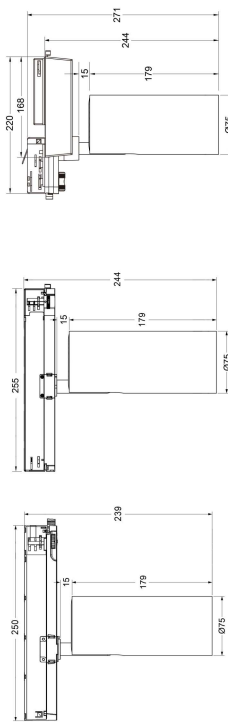

CAB

DOA



RFC, CAC

Model N o	Watt	Control	Dimension	Beamangle	Colortemp.	CRI	Lumen
F75mm (INT)	20W	No-Dim	D75*H179	15°/24°/36°/60°	27/30/35/4000K	Ra90/97	2000lm
F75mm (TRF)	20W	Triac Dim	D75*H179	15°/24°/36°/60°	27/30/35/4000K	Ra90/97	2000lm
F75mm (DOA)	20W	1-10V Knob	D75*H179	15°/24°/36°/60°	27/30/35/4000K	Ra90/97	2000lm
F75mm (CAB)	20W	CASAMBI	D75*H179	15°/24°/36°/60°	27/30/35/4000K	Ra90/97	2000lm
F75mm (DAB)	20W	DALI 6 Wire	D75*H179	15°/24°/36°/60°	27/30/35/4000K	Ra90/97	2000lm
F75mm (RFC)	20W	RF 2.4G	D75*H179	15°/24°/36°/60°	2700-6500K	Ra90/97	1600lm
F75mm (CAC)	20W	CASAMBI	D75*H179	15°/24°/36°/60°	2700-6500K	Ra90/97	1600lm



Input voltage: AC220-240V Housing color: White or Black



F90mm Fixed Lens






A75mm Alanod Aluminum Reflector




Dimmer on lamp
brightness 0.1 ~ 100%

Made with Alanod Aluminum Reflector
High brightness efficiency, more energy saving!

A75mm, Driver Inside Type

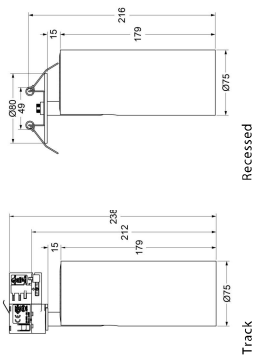

Track

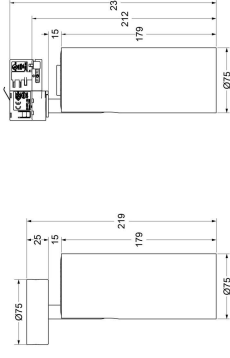

Recessed


Mounted

Model No	Watt	Control	Dimension	Beam angle	Colortemp.	CRI	Lumen
A75mm (ONF)	20W	No-Dim	D75*H179	20°/38°/60°	27/30/35/4000K	Ra90/97	2200lm
A75mm (TRB)	20W	Triac	D75*H179	20°/38°/60°	27/30/35/4000K	Ra90/97	2200lm
A75mm (DOL)	20W	1-10V Knob	D75*H179	20°/38°/60°	27/30/35/4000K	Ra90/97	2200lm
A75mm (DALI)	20W	DALI	D75*H179	20°/38°/60°	27/30/35/4000K	Ra90/97	2200lm


Input voltage: AC220-240V Housing color: White or Black




A75mm, Integrated Adapter Type, External Driver Box Type

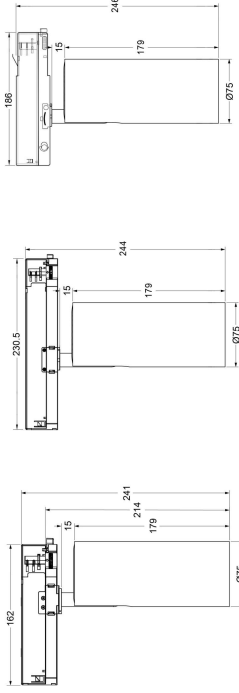

INT

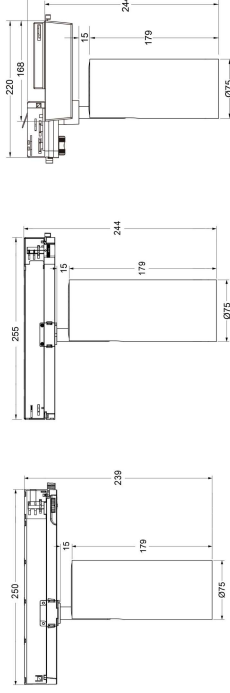

CAB

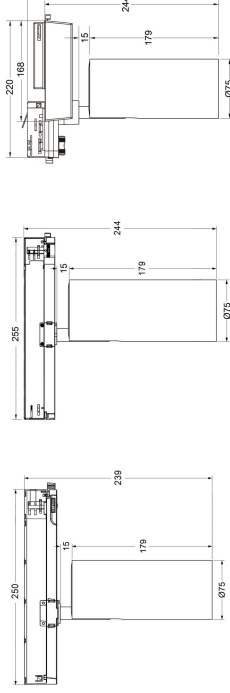

DOA

TRI

Model No	Watt	Control	Dimension	Beam angle	Color temp.	CRI	Lumen
A75mm (INT)	20W	No-Dim	D75*H179	20°/38°/60°	27/30/35/4000K	Ra90/97	2200lm
A75mm (TRI)	20W	Triac Dim	D75*H179	20°/38°/60°	27/30/35/4000K	Ra90/97	2200lm
A75mm (DOA)	20W	1-10V Knob	D75*H179	20°/38°/60°	27/30/35/4000K	Ra90/97	2200lm
A75mm (CAB)	20W	CASAMBI	D75*H179	20°/38°/60°	27/30/35/4000K	Ra90/97	2200lm
A75mm (DAB)	20W	DALI 6 Wire	D75*H179	20°/38°/60°	27/30/35/4000K	Ra90/97	2200lm
A75mm (RFC)	20W	RF 2.4G	D75*H179	20°/38°/60°	2700-6500K	Ra90/97	1800lm
A75mm (CAC)	20W	CASAMBI	D75*H179	20°/38°/60°	2700-6500K	Ra90/97	1800lm



Input voltage: AC220-240V Housing color: White or Black





A90mm Alanod Aluminum Reflector




Dimmer on lamp
brightness 0.1~100%

Made with Alanod Aluminum Reflector
High brightness efficiency, more energy saving!

A90mm, Driver Inside Type

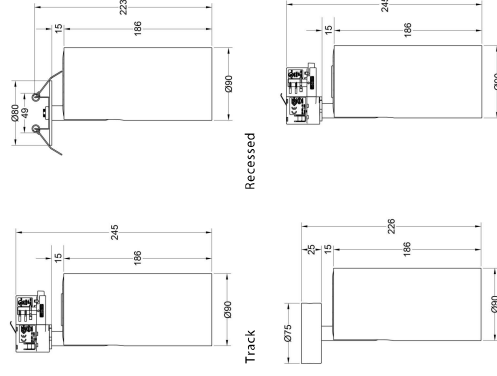


Recessed

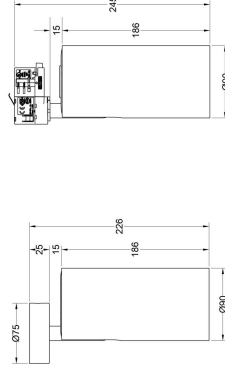


Mounted DOL

Model	N o	Watt	Control	Dimension	Beam angle	Colortemp.	CRI	Lumen
	A90mm (NF)	30W	No-Dim	D90×H186	15°/24°/38°/60°	27/30/35/4000K	Ra90/97	3200lm
	A90mm (TRB)	30W	Triac	D90×H186	15°/24°/38°/60°	27/30/35/4000K	Ra90/97	3200lm
	A90mm (DOL)	30W	1-10V Knob	D90×H186	15°/24°/38°/60°	27/30/35/4000K	Ra90/97	3200lm
	A90mm (DALI)	30W	DALI	D90×H186	15°/24°/38°/60°	27/30/35/4000K	Ra90/97	3200lm
	A90mm (DAC)	20W	DALI	D90×H186	15°/24°/38°/60°	2700~6500K	Ra90/97	1850lm


- Input voltage: AC220~240V Mousing color: White or Black

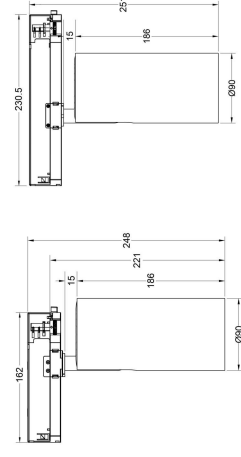


CAB

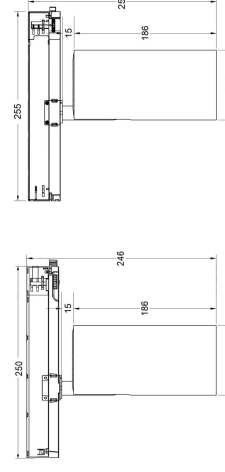

DAB



DOA



RFC, CAC

Model	Power	Control	Dimension	Beam angle	Colortemp.	CRI	Lumen
A90mm (INT)	30W	No-Dim	D90*H186	15°/24°/38°/60°	27/30/35/4000K	Ra90/97	3200lm
A90mm (TRI)	30W	Triac Dim	D90*H186	15°/24°/38°/60°	27/30/35/4000K	Ra90/97	3200lm
A90mm (DOA)	30W	1-10V Knob	D90*H186	15°/24°/38°/60°	27/30/35/4000K	Ra90/97	3200lm
A90mm (CAB)	30W	CASAMBI	D90*H186	15°/24°/38°/60°	27/30/35/4000K	Ra90/97	3200lm
A90mm (DAB)	30W	DALI 6 Wire	D90*H186	15°/24°/38°/60°	27/30/35/4000K	Ra90/97	3200lm
A90mm (RFC)	30W	RF 2.4G	D90*H186	15°/24°/38°/60°	2700~6500K	Ra90/97	2600lm
A90mm (CAC)	30W	CASAMBI	D90*H186	15°/24°/38°/60°	2700~6500K	Ra90/97	2600lm

- **Input voltage:** AC220~240V **Housing color:** White or Black