

UNITRACK

CUSTOMIZE YOUR LIGHT

CUSTOMIZE YOUR **COLOR**



CUSTOMIZE YOUR **TEXTURE**



CUSTOMIZE YOUR **SIZE**



CUSTOMIZE YOUR **CEILING**




CUSTOMIZE YOUR LIGHT

Soft Spot



High Density Spot

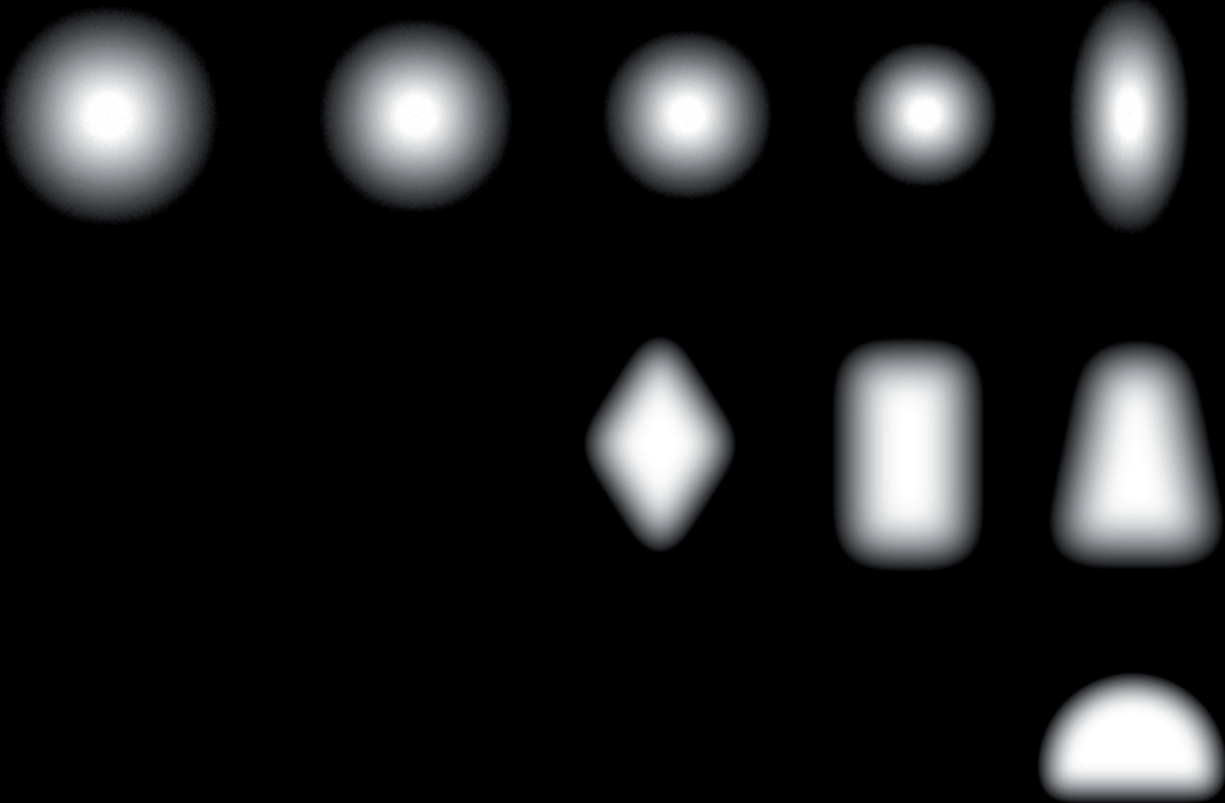


Wall Washer



Wall Washer Double Asymmetric



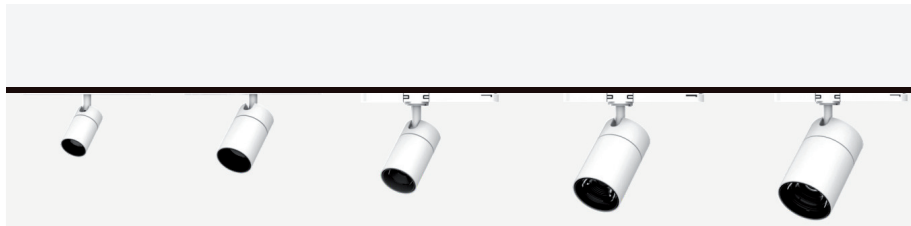

UNI 35T UNI 45T UNI 55T UNI 70T UNI 85T

Ø35mm Ø45mm Ø55mm Ø70mm Ø85mm

COB LED

- 6W
- 300lm-500lm
- 2700K
- 3000K
- 4000K
- SDCM<3
- CRI>80
- CRI>90
- Magnetic track48V
- DC48V

COB LED

- 9W
- 11W
- 500lm-900lm
- 2700K
- 3000K
- 4000K
- SDCM<3
- CRI>80
- CRI>90
- CRI>95
- Magnetic track48V
- DC48V

COB LED

- 11W
- 15W
- 1000lm-2000lm
- 2700K
- 3000K
- 4000K
- SDCM<3
- CRI>80
- CRI>90
- CRI>95
- Magnetic track48V
- DC48V
- AC220V

ZOOM

WALL WASHER

COB LED

- 20W
- 23W
- 27W
- 2000lm-3000lm
- 2700K
- 3000K
- 4000K
- SDCM<3
- CRI>80
- CRI>90
- CRI>95
- DC48V
- AC220V

ZOOM

WALL WASHER


PROJECTOR

COB LED


- 27W
- 35W
- 40W
- 2000lm-3600lm
- 2700K
- 3000K
- 4000K
- SDCM<3
- CRI>80
- CRI>90
- CRI>95
- AC220V

ZOOM

WALL WASHER

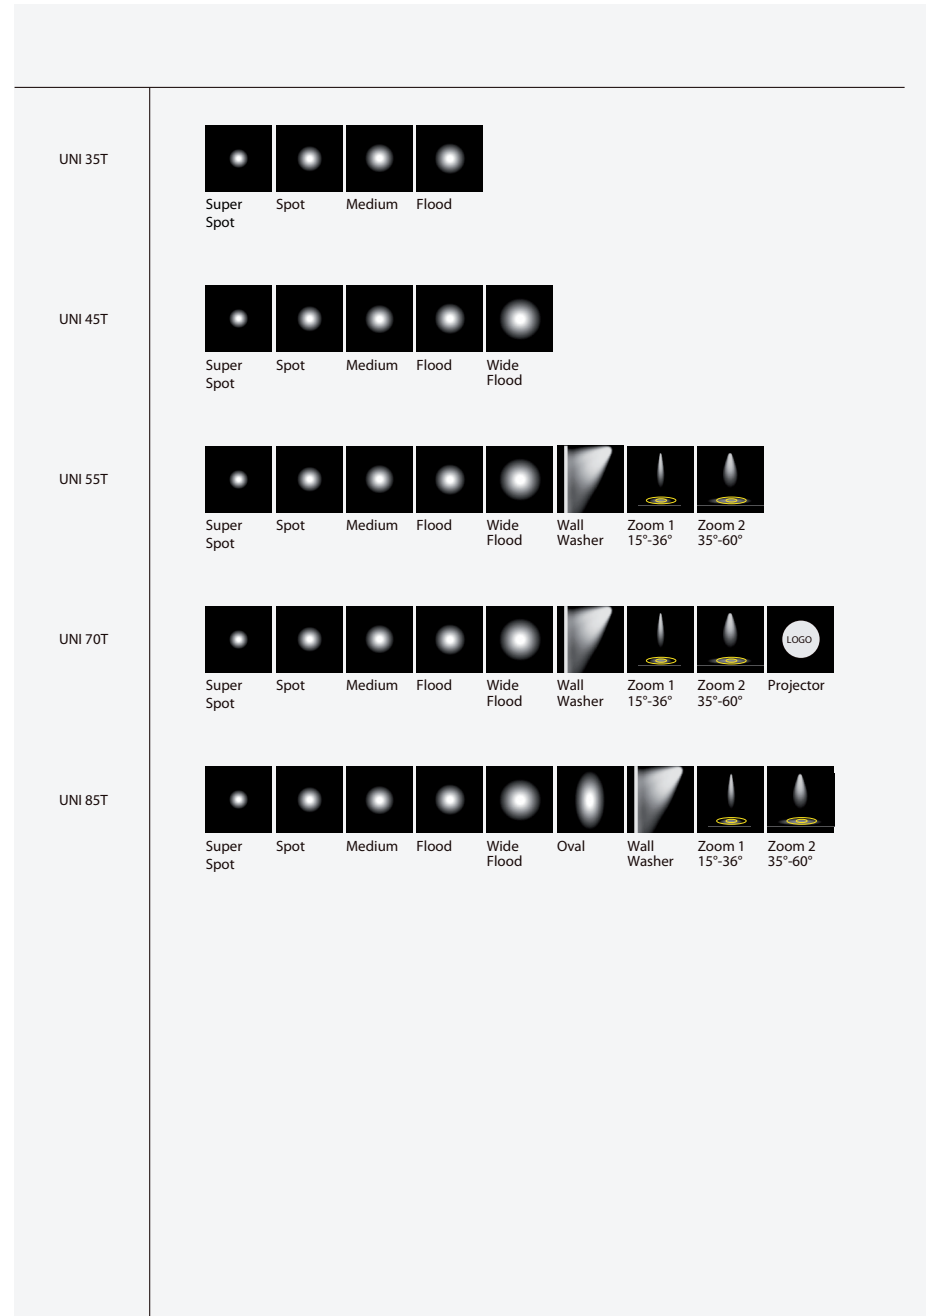


UNI 35T




Super Spot Spot Medium Flood

UNI 45T




Super Spot Spot Medium Flood Wide Flood

UNI 55T



Super Spot Spot Medium Flood Wide Flood Wall Washer Zoom 1 15°-36° Zoom 2 35°-60°

UNI 70T




Super Spot Spot Medium Flood Wide Flood Wall Washer Zoom 1 15°-36° Zoom 2 35°-60° Projector

UNI 85T




Super Spot Spot Medium Flood Wide Flood Oval Wall Washer Zoom 1 15°-36° Zoom 2 35°-60°


UNITRACK Lighting System Accessories

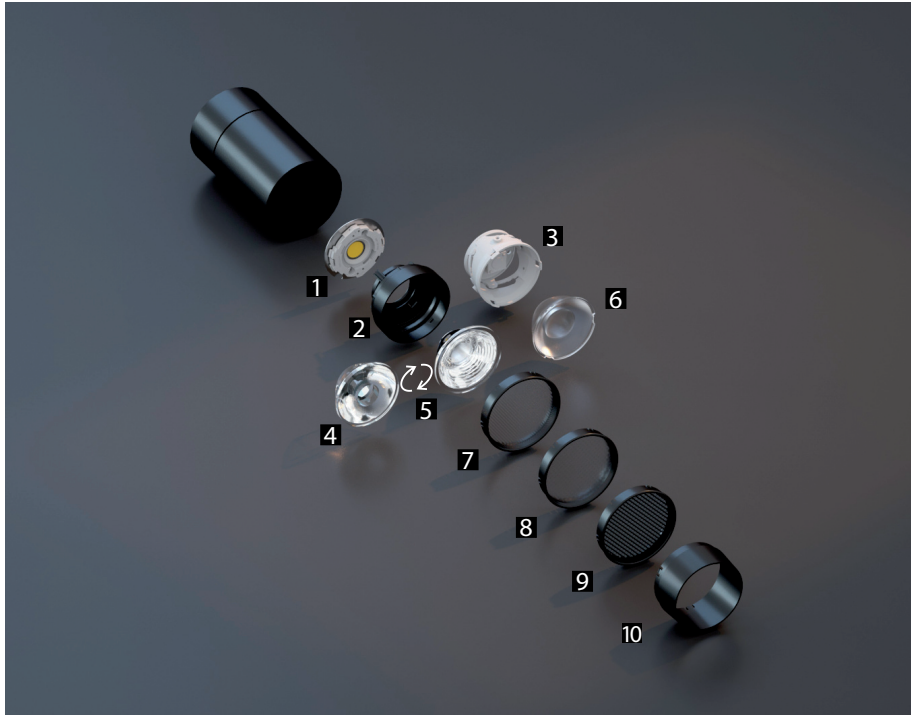

- 1** COB
- 2** Lens holder
- 3** Zoom holder
- 4** Soft beam lens
- 5** High intensity lens
- 6** Zoomable lens

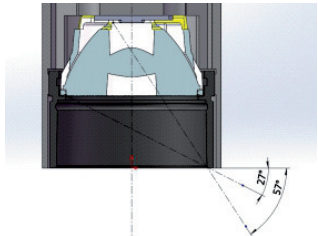

UGR<19

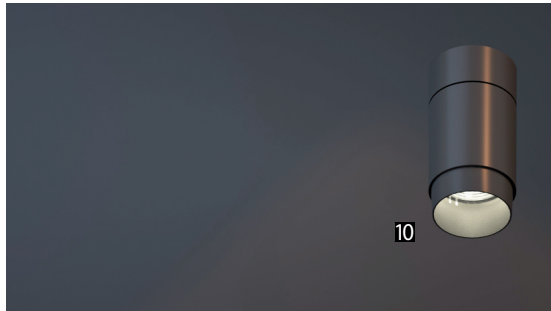

accessories	UNI 35T	UNI 45T	UNI 55T	UNI 70T	UNI 85T
48V					
220V					
oval dif fuser 7					
soft dif fuser 8					
Honeycomb 9					
Snoot 10					




UNI 35T
48V/Magnetic

UNI 45T
48V/Magnetic 2X

UNI 35T

48V/Magnetic

With its miniaturized design and various glare control accessories, there is a room for UNI35T anywhere where accent and diverse lighting effects are needed. This multi-functional product, combined with a low voltage/magnetic track, makes it a perfect choice for growing lighting tasks in different spaces like shop displays, private homes, restaurants, hotels and art exhibitions. With a few centimetres in size, the flexibility and multi-function makes it truly a versatile lighting tool for architects and designers.

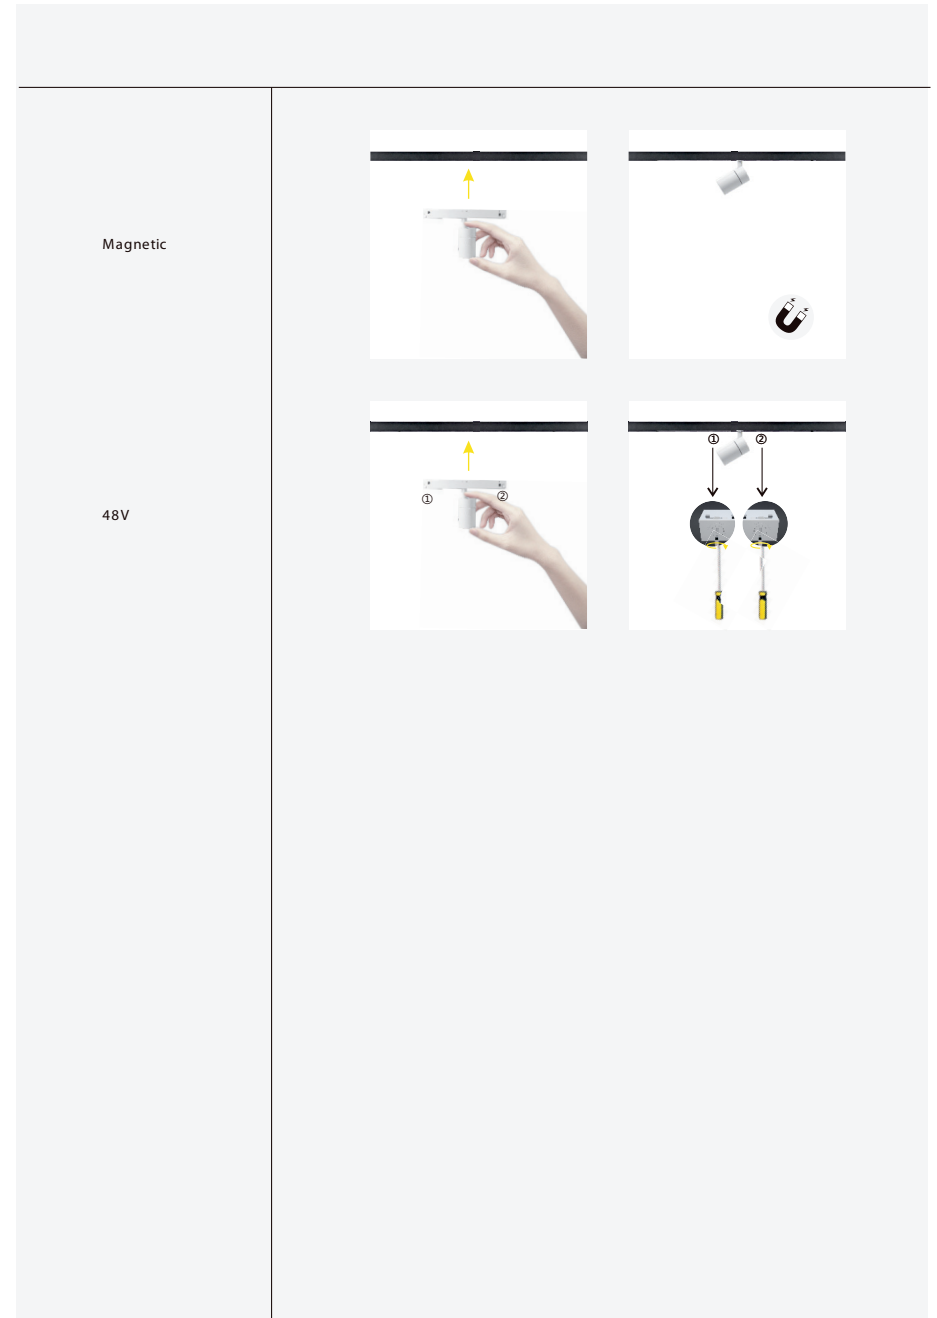

UNI 45T
48V/Magnetic



UNI 45T
48V/Magnetic





UNI 45T
48V/Magnetic 2X

UNI 55T
48V/Magnetic/AC 220V

UNI 70T
48V/AC 220V

UNI 85T
AC 220V

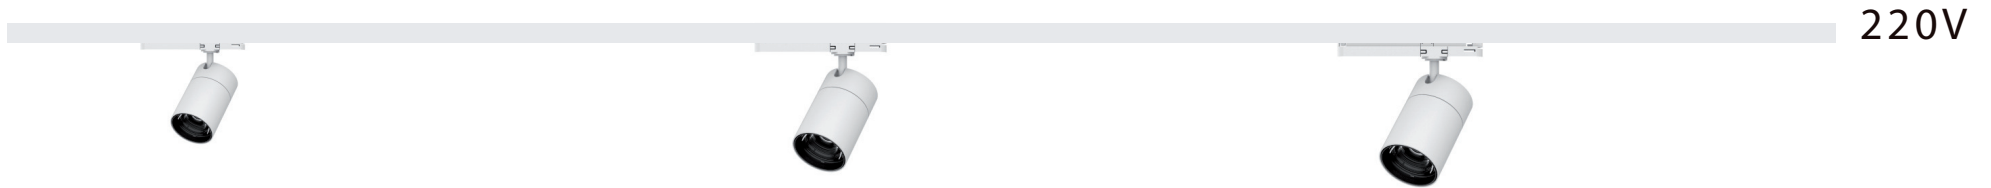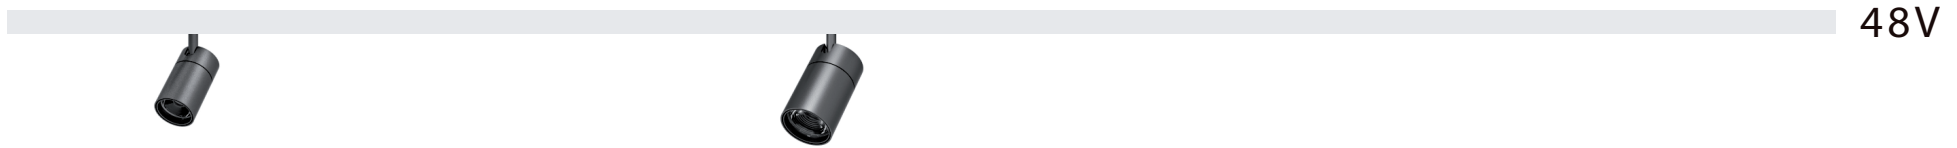

UNITRACK ZOOM



TYPE 1



15° ~ 36°

TYPE 2



35° ~ 60°




Flux out: 1240 lm				Flux out: 1789 lm			
Height	Ramp, Max	Angle (14.85deg)	Diameter	Height	Ramp, Max	Angle (14.85deg)	Diameter
3.284ft 1m	1894,247000 18422,32000lx	0.805ft 25.45cm		3.284ft 1m	332,3,750.450 3726,89791lx	2.851ft 87.91cm	
6.567ft 2m	451,1,617.450 4895,64461lx	1.610ft 49.67cm		6.567ft 2m	332,1,375.450 1451,22201lx	5.702ft 172.42cm	
9.850ft 3m	300,3,178.450 2159,23941lx	2.415ft 73.61cm		9.850ft 3m	55,14,83.450 636,1,897.11x	8.554ft 259.92cm	
13.133ft 4m	225,6,108.100 1724,14411lx	3.220ft 98.13cm		13.133ft 4m	33,27,46.910 100,1,409.76x	11.406ft 347.82cm	
16.416ft 5m	176,12,99.780 1796,1,10411lx	4.025ft 122.68cm		16.416ft 5m	21,39,30.810 239,2,393.21x	14.158ft 431.76cm	

ZOOM IN




ZOOM OUT



WALL WASHER ASYMMETRIC

Every lighting task requires specific lighting tools. For this reason, we offer lighting experts different lighting distributions and beam shapes. Besides the spot lens, you can also find wall washer lens from our multi-functional UNITRACK lighting system. This wall washer lens is designed to provide very high uniformity of illuminance on the wall.

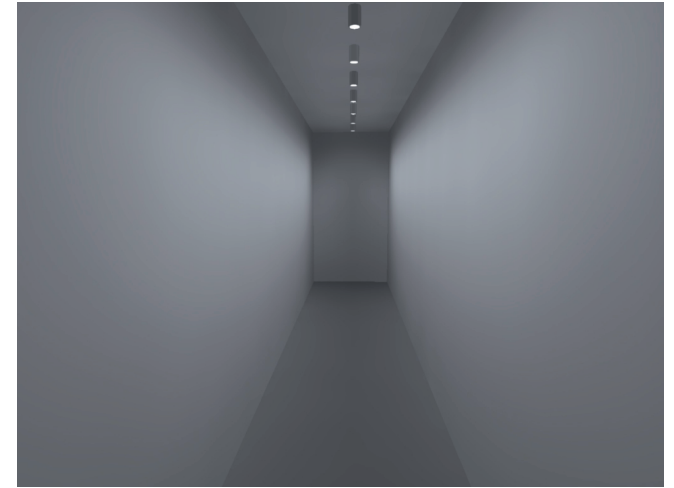

This double asymmetric lens is designed to simplify wall washer lighting design for shop display shelves and passageways. A single lens brings high uniformity of illuminance to the walls or products on display shelves on both sides.



DOUBLE ASYMMETRIC



Asymmetric





SIDE VIEW

TOP VIEW



UNI 55T



UNI 70T

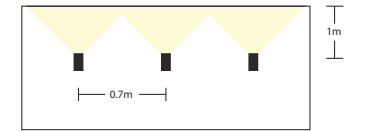



UNI 85T

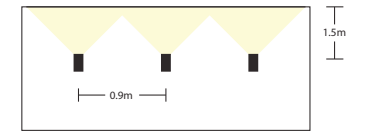



Double Asymmetric





UNI 55T



UNI 70T




UNI 85T




Play with your light

Light sets atmosphere in different life scenarios whenever in shopping, work, listening to music, watching TV, receiving a visitor, with family or even when tasting whiskey, adjust the brightness or tune the color of different lights may bring you different motions and feelings in need. Play with our smart UNITRACK lighting system to achieve whatever atmosphere you desire in daily life. You can easily do this by using either your smart phone or a remote controller by simply pressing the button. CASAMBI, DALI, Phase-cut, Knob Dimming are all included in this smart lighting system.

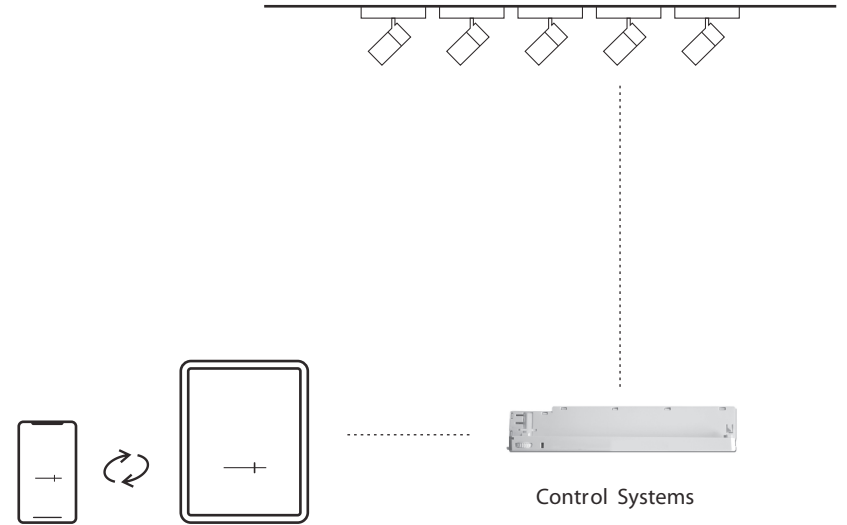

TRACK Warm Dimming

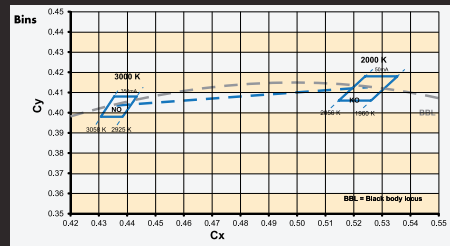

COLOUR TUNING BY DIM LEVEL
 - 50 mA: 2000 K
 - 350 mA: 3000 K


NARROW COLOUR TOLERANCES:
 3 STEP MacAdam

HIGH COLOUR RENDERING INDEX:
 CRI > 90

COMPACT SHAPE
 - 13.5 x 13.5 mm
 - LES: Ø 10 mm


Perfect Ambience Created by Light

Tunable lighting enriches your life more than ever through superb optimizations

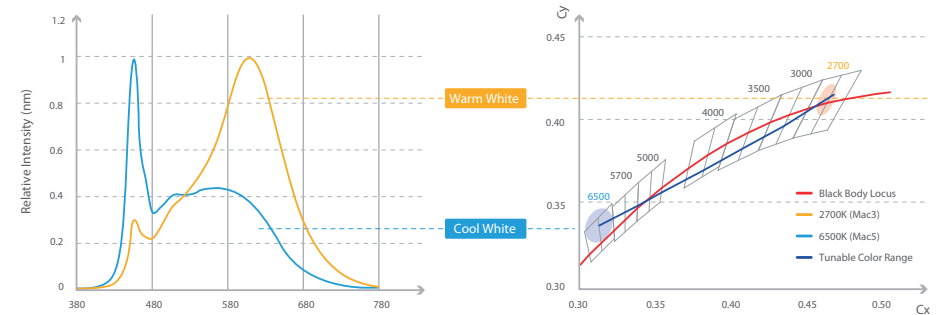

Wide Range of Color Temperature
 From 2700K through 6500K white color tunable

ALT70 PROJECTOR

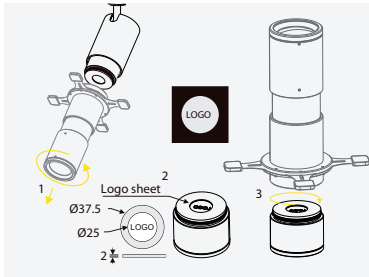


Achieve clear Logo projection by replacing Logo sheet.




The four insert piece would help to create different shape of light spot as below pictures




Slide up & d down to adjust uniformity of light spot

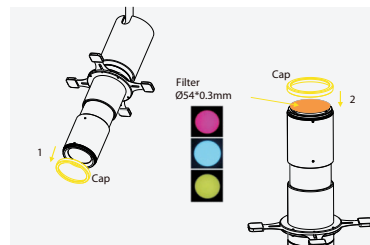

By installing different filters, you can get the same spots as the color of the filter.

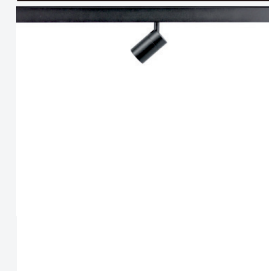


UNI 35T-L06			
6W	(lm)		
	2700K	3000K	4000K
16°	482	518	549
24°	458	492	521
34°	460	494	524

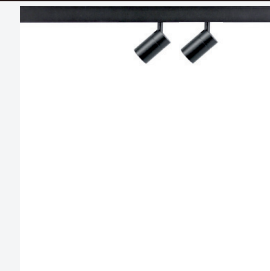

2X-UNI 35T-L06			
12W	(lm)		
	2700K	3000K	4000K
16°	964	1036	1098
24°	915	984	1043
34°	920	989	1048




UNI 45T-L11			
11W	(lm)		
	2700K	3000K	4000K
14°	710	764	809
20°	702	755	801
32°	708	762	808
56°	598	643	682




2X-UNI 45T-L11			
22W	(lm)		
	2700K	3000K	4000K
14°	1420	1527	1619
20°	1405	1510	1601
32°	1417	1524	1615
56°	1197	1287	1364




UNI 55T-L11			
11W	(lm)		
	2700K	3000K	4000K
15°	758	815	864
20°	748	804	853
39°	744	800	848
50°	661	711	753



UNI 55T-11			
11W	(lm)		
	2700K	3000K	4000K
15°	758	815	864
20°	748	804	853
39°	744	800	848
50°	661	711	753



UNI 55T-15			
15W	(lm)		
	2700K	3000K	4000K
15°	1034	1112	1178
20°	983	1057	1121
39°	977	1050	1113
50°	865	930	986

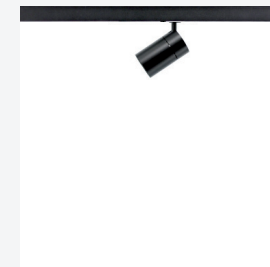

UNI 55T-L15			
15W	(lm)		
	2700K	3000K	4000K
15°	1034	1112	1178
20°	983	1057	1121
39°	977	1050	1113
50°	865	930	986



UNI 55T-D15			
15W	(lm)		
	2700K	3000K	4000K
15°	1034	1112	1178
20°	983	1057	1121
39°	977	1050	1113
50°	865	930	986




UNI 70T-L20

20W	(lm)		
	2700K	3000K	4000K
16°	1597	1717	1820
22°	1588	1707	1809
34°	1473	1584	1679
43°	1443	1552	1645




UNI 70T-23

23W	(lm)		
	2700K	3000K	4000K
16°	2000	2151	2280
22°	1998	2149	2278
34°	1886	2028	2150
43°	1870	2010	2131




UNI 70T-D23

23W	(lm)		
	2700K	3000K	4000K
16°	2000	2151	2280
22°	1998	2149	2278
34°	1886	2028	2150
43°	1870	2010	2131




UNI 55T-Z11

11W	(lm)		
	2700K	3000K	4000K
15-36°	856	921	976
36-60°	774	832	882




UNI 55T-Z15

15W	(lm)		
	2700K	3000K	4000K
15-36°	1199	1289	1367
36-60°	1084	1165	1235



UNI 70T-Z23

23W	(lm)		
	2700K	3000K	4000K
15-36°	2093	2250	2385
36-60°	1880	2022	2143



UNI 70T-L27

27W	(lm)		
	2700K	3000K	4000K
16°	2295	2468	2616
22°	2300	2473	2622
34°	2157	2319	2458
43°	2149	2311	2450




UNI 70T-27

27W	(lm)		
	2700K	3000K	4000K
16°	2295	2468	2616
22°	2300	2473	2622
34°	2157	2319	2458
43°	2149	2311	2450




UNI 85T-27

27W	(lm)		
	2700K	3000K	4000K
17°	2194	2359	2501
23°	2128	2288	2426
34°	2148	2274	2410
43°	2028	2181	2312
34X62	2036	2189	2321



UNI 70T-Z27

27W	(lm)		
	2700K	3000K	4000K
15-36°	2447	2631	2789
36-60°	2196	2362	2503



UNI 85T-Z35

35W	(lm)		
	2700K	3000K	4000K
15-36°	3280	3527	3739
36-60°	3013	3240	3434



UNI 85T-Z40

40W	(lm)		
	2700K	3000K	4000K
15-36°	3827	4115	4362
36-60°	3516	3780	4007



UNI 85T-D27

27W	(lm)		
	2700K	3000K	4000K
17°	2194	2359	2501
23°	2128	2288	2426
34°	2148	2274	2410
43°	2028	2181	2312
34X62	2036	2189	2321




UNI 85T-35

35W	(lm)		
	2700K	3000K	4000K
21°	3012	3239	3433
26°	2965	3188	3379
36°	2943	3165	3354
45°	2834	3047	3230
36X59	2856	3071	3255




UNI 85T-40

40W	(lm)		
	2700K	3000K	4000K
21°	3390	3639	3858
26°	3384	3639	3857
36°	3314	3381	3584
45°	3144	3381	3584
36X59	3176	3416	3620




UNI 70T-P23

23W	(lm)		
	2700K	3000K	4000K
P15	463	498	528




UNI 70T-P27

27W	(lm)		
	2700K	3000K	4000K
P15	540	581	616




UNI 55T-W11

	(lm)		
11W	2700K	3000K	4000K
W	748	805	853
D	767	825	874




UNI 55T-W15

	(lm)		
15W	2700K	3000K	4000K
W	1048	1127	1194
D	1074	1155	1224




UNI 70T-W23

	(lm)		
23W	2700K	3000K	4000K
W	1728	1858	1970
D	1564	1682	1783




UNI 70T-W27

	(lm)		
27W	2700K	3000K	4000K
W	2016	2168	2298
D	1825	1963	2080

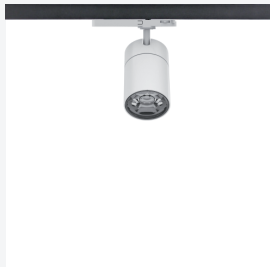

UNI 85T-W35

	(lm)		
35W	2700K	3000K	4000K
W	2719	2923	3099
D	2600	2796	2963



UNI 55T-W40

	(lm)		
40W	2700K	3000K	4000K
W	3172	3411	3615
D	3033	3262	3457



SPATALUX GmbH

Spechtweg 6
 CH-8032 Zürich
 T: +41 (0) 586 98 90
 E-Mail: info@spatalux.ch
[Http://www.spatalux.ch](http://www.spatalux.ch)

Showroom und Büro:
 Seefeldstrasse 301
 CH-8008 Zürich

Termine nach Vereinbarung